

Dishwashing

EVO Generation - Concept

GLASSWASHER CO-402 COLD B DD

DIMENSIONS		Article	Packed
Length	mm	**470,00**	**530,00**
Depth	mm	**520,00**	**680,00**
Height	mm	**720,00**	**890,00**
Weigth	Kg	**36,00**	**40,00**
Volumen	m3		**0,32**

ELECTRICITY		
Electric power	KW	**3,06**
230V -1+N		**2x2,5+T - 25 A**
230V - III		**3x1,5+T - 16 A**
400V - III+N		**4x1,5+T - 10 A**

WATER	
Water consumption (lit/h)	**80,00**
Pressure (Kg/cm2)	**2 ÷ 4**

GAS

Not used

STEAM Not used

AIR Not used

LEVEL SOUND (dB) **65,00**

GLASSWASHER CO-402 COLD B DD


Front loading glasswasher - EVO Generation - Advance range.
Basket size: 400 x 400 mm.
Hourly production: 40 baskets/hour .
Clearance (max ware height): 275 mm.
Valid for dishes Ø 270 mm.
Wash cycles: 90" - 120" - 180".
Electronic control. Digital displays.
Selector for an optional cold rinse at the end of the cycle.


Made of stainless steel.
The door has double skin.
Double rotating wash and rinse systems, above and below, made of stainless steel.
Wash pump: 260 W.
Drain pump: 30 W. Drainage cycle.
Tank with 2.0 kW heating element.
Tank capacity: 13 litres.
Boiler with 2.8 kW heating element.
Boiler capacity: 4 litres.
Water consumption: 2.4 litres/rinse.
Thermostatic temperature control: washing at 60 ºC and rinsing at 90 ºC.
Security thermostats.
Built-in automatic rinse dispenser and detergent doser.
Built-in non-return valve.
Safety magnetic switch for door opening.
Adjustable legs.


Total power: 3.06 kW.
Dimensions: 470 x 520 x 720 mm.

Equipment: one basket 400x400, one supplement for dishes and one cutlery container.

Connections points	**X**	**Y**	**Z**	**Diameter**	**Information**
ELECTRICITY	210	50	65		
SOFT COLD WATER	305	50	65	3/4"	
DRAIN	370	50	65	30 x 25	



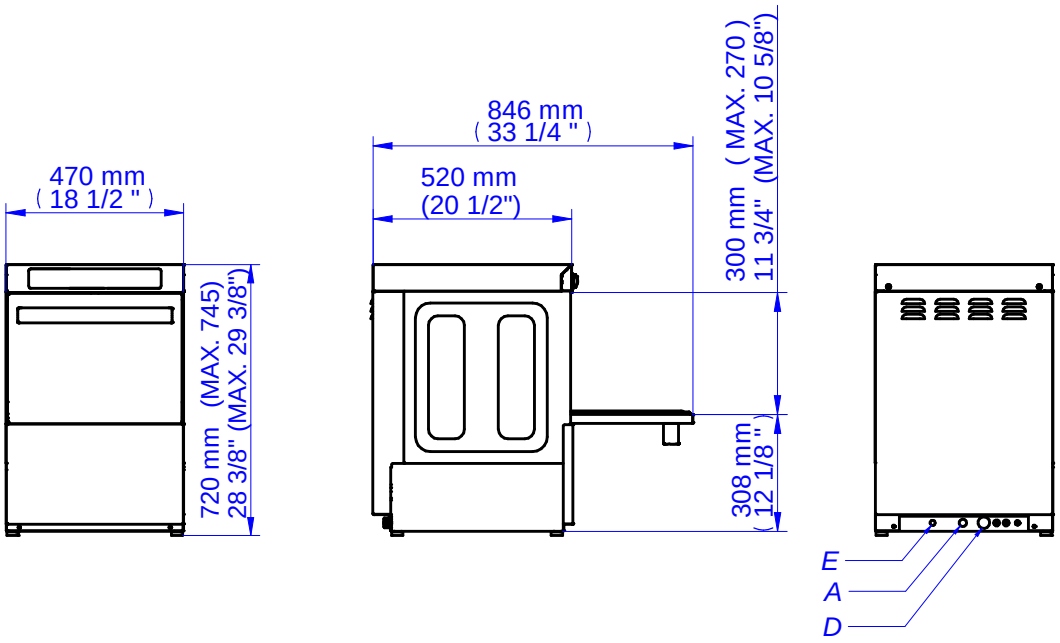

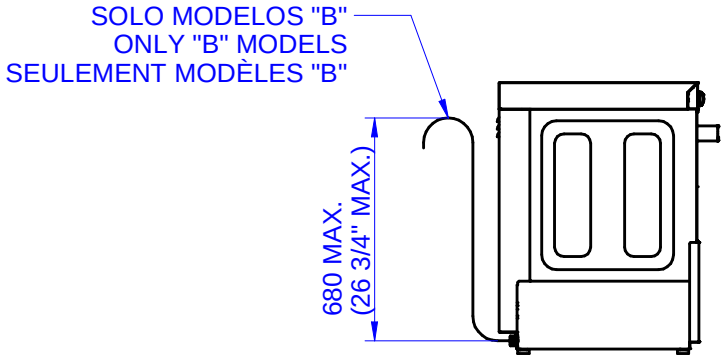

A: ENTRADA DE AGUA
E: ALIMENTACIÓN ELÉCTRICA
D: DESAGÜE

A: WATER INLET
E: ELECTRICAL CONNECTION
D: DRAIN

A: ARRIVÉE D´EAU
E: CONNEXION ÉLECTRIQUE
D: VIDANGE