TB 1405

Ice Pebbles

Undercounter ice maker up to 150 kg - Pebble system

Hotel	■■■■■■
Restaurant	■■■■■■
Fast food	■■■■■■■
Bar	■■■■■■■■
Disco	■■■■■■■■
Fish market	
Supermarket	
Medical & SPA	■■■■
Industry	

▶ Position n°



▶ Features & Plus

- Pebble ice - 91% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- AISI 304 SS evaporator
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages



AISI 304 SS Scotch Brite finish



Removable and cleanable air filter



AISI 304 SS evaporator




Dust-proof water basin



Disappearing insulated door

▶ Available pebble size

drawing for reference only



▶ Prod. 24h

	Air temp.		Water temp.		kg	lbs
	10° C	50° F	10° C	50° F	150	331
	21° C	70° F	15° C	60° F	140	309

2 Years Warranty
subject to limitations

▶ Certifications available for this model

BREMA ICE MAKERS SPA
Via dell'Industria 10,
20020 Villa Cortese (MI), Italy
tel. +39 0331 434811
fax +39 0331 433833
www.bremaice.it
info@bremaice.it

Bim + Data download


We are Brema

Ice Pebbles

TB 1405

BREMA Ice Makers

Undercounter ice maker up to 150 kg - Pebble system

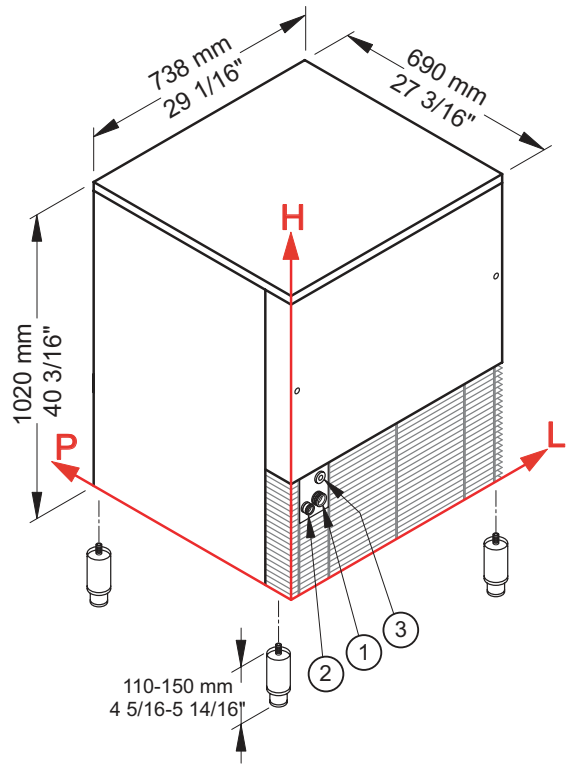

Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Performances

Air temperature \ Water temperature	10° C	50° F	15° C	60° F	21° C	70° F
10° C	150 kg					
50° F		331 lbs				
21° C			140 kg			
70° F				309 lbs		
32° C					126 kg	
90° F						278 lbs

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water in.: 104 mm / 4 2/16" - 247 mm / 9 12/16" - 3/4"
② Water out.: 53 mm / 2 1/16" - 240 mm / 9 7/16" - 24 mm / 15/16"
③ Electrical connections: 92 mm / 3 10/16" - 319 mm / 12 9/16"

Technical information

Production in 24h	140 kg / 309 lbs
Store capacity, up to	50 kg / 110 lbs
Cooling system	A - W
Approximate pebble size	8 x 16 x 7
Refrigerant	R404A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	650 W
Fuse	10 A
Finish	AISI 304 stainless steel, scotch brite

Water consumption	A: 1 l/kg - 12,0 gal/100 lbs
	W: 6,4 l/kg - 76,7 gal/100 lbs
Sizes (L-P-H mm)	738 - 690 - 1020
(L-P-H in)	29 1/16 - 27 3/16 - 40 3/16
Sizes with pack (L-P-H mm)	780 - 735 - 1185
(L-P-H in)	30 11/16 - 28 15/16 - 46 10/16
Net weight	94 kg / 207 lbs
Gross weight	105 kg / 231 lbs

All the technical information must be considered at the following conditions:
Sizes without feet
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

BREMA Ice Makers

BREMA ICE MAKERS SPA
Via dell'Industria 10,
20020 Villa Cortese (MI), Italy
tel. +39 0331 434811
fax +39 0331 433833
www.bremaice.it
info@bremaice.it

Bim + Data download

We are Brema