Verona

SANREMO

Verona



SANREMO
COFFEEMACHINES
made in italy

SED TECHNOLOGY

SED VERSION
Guarantees an electronic dosing system through the button panel

SAP TECHNOLOGY

SAP VERSION
Allows the semi-automatic programming of doses



TIME AND TEMPERATURE DISPLAY
only mod. SED



GROUP SR 61
Optimized to maintain the ideal coffee extraction temperature




Verona
Link to the website

SANREMO
COFFEEMACHINES

_Colors

	Red	RAL 3002		Silver	RAL 9006
	Matte black	RAL 9005		Pearl white	RAL 1013
	Black	RAL 9005		White	RAL 9003

_Versions

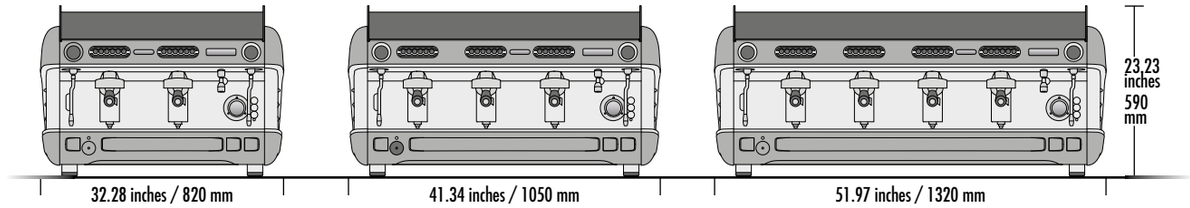


2 group SED/SAP
2 steam taps
1 water tap
1 one-cup portafilters
2 two-cup portafilters

3 group SED/SAP
2 steam taps
1 water tap
1 one-cup portafilters
3 two-cup portafilters

4 group SED/SAP
2 steam taps
1 water tap
1 one-cup portafilters
4 two-cup portafilters



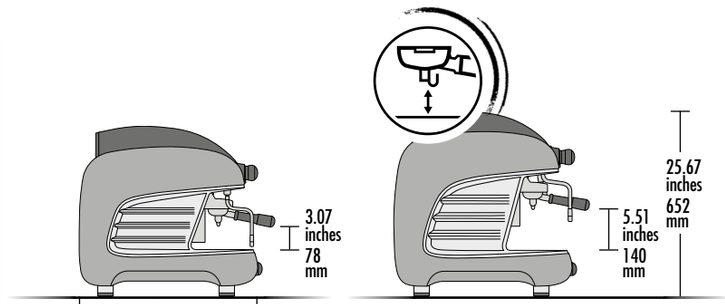

TALL VERSION

_Characteristics

GLASS LEVEL
Allows to monitor the water level in the boiler.

MANUAL BOILER LOAD
Allows to bypass the electronic-level control.

ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation of water solenoid in the first phase of brewing.

GROUP SR 61
Chromed brass grouphead with thermosiphonic circulation system optimized to maintain the ideal coffee extraction temperature.

EASY SERVICE
Fast access to the internal parts for quick and easy technical service.

ELECTRONIC AUTO-LEVEL
Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.

MULTIFUNCTION DISPLAY
Allows to monitor the right functioning of the machine and to program the main functions.

AUTOMATIC CLEANING CYCLE
Process for coffee groups cleaning.

STATIC RELAY BOILER TEMPERATURE
Allows to regulate the temperature as accurately as possible.

DOUBLE READING GAUGE
Allows to control at the same time the boiler pressure and the distribution pressure.

_Optional

AUTOSTEAM
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.

COMPETITION FILTERS
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

EXTERNAL VOLUMETRIC PUMP

MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immedate mixing of cold / hot water for a better chemical and organoleptic quality.

_Technical data

		2 group	3 group	4 group
voltage	V	220-240 1N / 380-415 3N		
power imput	kW	3.15 - 3.35	5.8 - 6.05	5.8 - 6.05
steam boiler capacity	US gal / lt	3.17 / 12	5.02 / 19	5.97 / 22.6
steam boiler power	kW	2.95	5.6	5.6
pump power	kW	0.15	0.15	0.15
net weight	lb / kg	150 / 68	187 / 85	240 / 109

CE

CUP WARMER
Dedicated resistor to keep all the cups at the optimal temperature.

NAKED PORTAFILTERS

BLUETOOTH COMMUNICATION SYSTEM

All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.

VERONA_UK_VIDEO_2018_11_19

For more information about our
coffee machines please contact us
at *export@sanremomachines.com*

SANREMO
COFFEEMACHINES

SANREMO coffee machines s.r.l.
Via Giacomo Bortolan 52
31050 Vascon di Carbonera [TV] – ITALY
T +39 0422 448900
F +39 0422 448935
www.sanremomachines.com

Sanremo Coffee Machines s.r.l. has a certified Quality Management System
according to UNI EN ISO 9001:2015 standard.