# NW 1408 XSafe

## Modular Ice Machine 640 kg

Scotsman Ice Systems

| | |
|---|---|
| Item #: | |
| Project: | |
| Quantity: | |




### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 1408
**Dice** 10 g
W 22 x D 22 x H 22 mm



NW H 1408
**Half Dice** 6 g
W 10 x D 22 x H 28 mm



NW L 1408
**Large Dice** 15 g
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

### REFRIGERANT GAS

R404A
R452A

### VOLTAGE V/Hz/ph

230/50/1
230/60/1

### RECOMMENDED BINS

| Head | Bins | | kg |
|---|---|---|---|
| NW 1408 | ✔ | **SB530** | 243 |
| | CBT48EAMCD<br>CBT48FMCD | **SB948** | 406 |
| | CBT52EAMCD | **SB1025** | 478 |
| | ● | **UBH1100** | 553 |
| | ● | **UBH1600** | 812 |

**LEGEND:**
✔ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxxxxx : need additional bin top

### CERTIFICATIONS

CE

### OPERATING REQUIREMENTS

| | Minimum | Maximum |
|---|---|---|
| Air temperature | 10 | 40 |
| Water temperature | 5 | 35 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 640 kg


20 December 2020


# NW 1408 XSafe

## Modular Ice Machine 640 kg

Scotsman Ice Systems


| | |
|---|---|
| Item #: | |
| Project: | |
| Quantity: | |

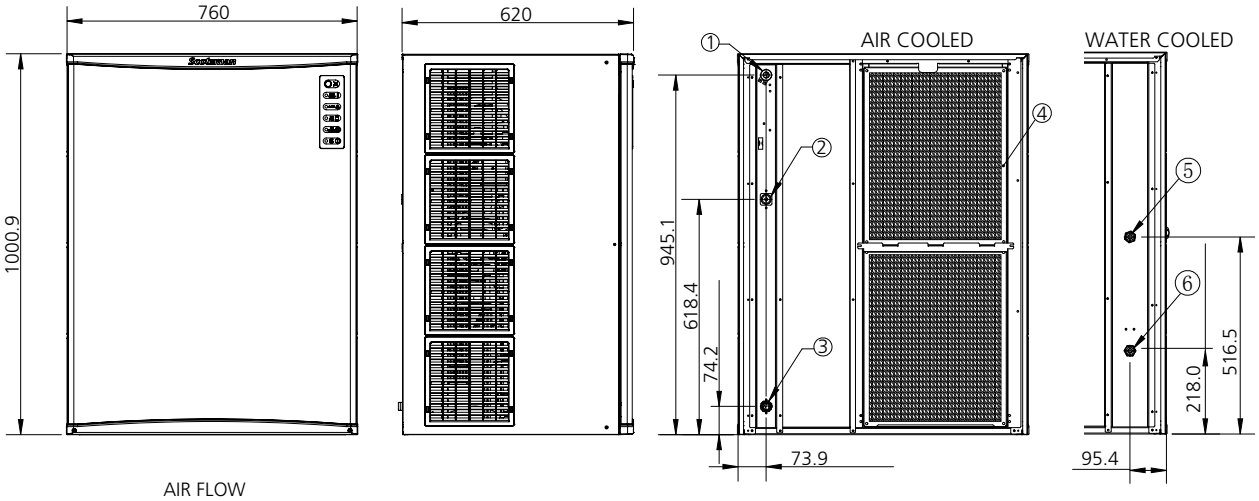

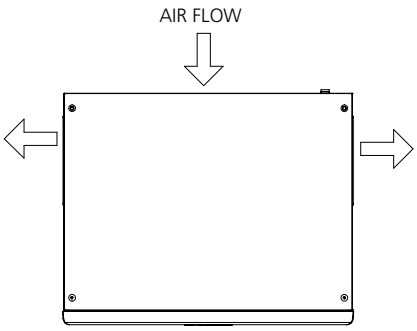
UNIT OF MEASUREMENT: **mm**

1. CORD SET
2. 3/4" GAS WATER INLET
3. 13/16" OD - WATER OUTLET
4. AIR INLET / AIR FILTER
5. 3/4" GAS-WATER OUTLET
6. 3/4" GAS-WATER INLET

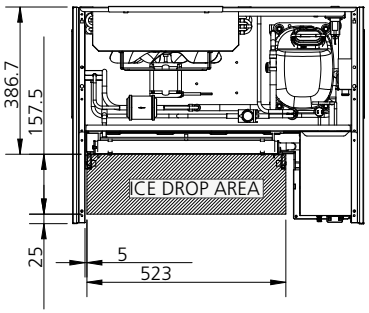


| UNIT DATA | | SHIPPING DATA | |
|---|---|---|---|
| Size (W x D x H) | 765 x 610 x 1000 mm | Carton (W x D x H) | 830 x 690 x 1160 mm |
| Net weight | 130 kg | Weight | 145 kg |

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

| | | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption (*) | | Water usage (*) | Instant power | Compressor | Circuit wires | Max. fuse size |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Version | Voltage | 10°C/10°C | 21°C/10°C | 32°C/21°C | kWh/ 100 kg | kWh/ 24h | l/h | W | W | No. x Ømm² | A |
| | | kg | kg | kg | | | | | | | |
| NWH 1408 AS | 230/50/1 | 660 | 650 | 530 | 10.8 | 57.2 | 31.1 | 3365 | 10500 | 3 x 2.5 | 30 |
| NWH 1408 ASR | 230/50/1 | 680 | 660 | 500 | 10.8 | 54.0 | 29.8 | 3365 | 10500 | 3 x 2.5 | 30 |
| NWH 1408 WS | 230/50/1 | 660 | 660 | 590 | 9.3 | 54.6 | 292.6 | 3365 | 10500 | 3 x 2.5 | 30 |
| NWL 1408 AS | 230/50/1 | 620 | 600 | 510 | 10.4 | 52.8 | 27.6 | 3365 | 10500 | 3 x 2.5 | 30 |
| NWL 1408 WS | 230/50/1 | 620 | 630 | 560 | 8.8 | 49.4 | 282.8 | 3365 | 10500 | 3 x 2.5 | 30 |
| NW 1408 AS | 230/50/1 | 640 | 630 | 500 | 11.2 | 56.2 | 26.6 | 3365 | 10500 | 3 x 2.5 | 30 |
| NW 1408 WS | 230/50/1 | 660 | 650 | 580 | 9.0 | 52.4 | 261.0 | 3365 | 10500 | 3 x 2.5 | 30 |
| NWH 1408 AS | 230/60/1 | 660 | 641 | 480 | 11.2 | 54.0 | 32.6 | 3000 | 9442 | 3 x 2.5 | 30 |
| NWH 1408 ASR | 230/60/1 | 630 | 580 | 480 | 11.7 | 56.1 | 25.5 | 3000 | 9442 | 3 x 2.5 | 30 |

Modular Ice Machine 640 kg