AF 103 XSafe

Self Contained Ice Machine 120 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	



FEATURES

- Produces granular shape ice flakes, 75% hardness.
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues.
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish.
- Ergonomically convenient, slanted & disappearing storage bin door.
- Front access for easier maintenance.
- Front-in, front-out airflow allows for built-in installations.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AF 103
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

30 kg

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 120 kg

10 November 2020


AF 103 XSafe

Self Contained Ice Machine 120 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	

Self Contained Ice Machine 120 kg

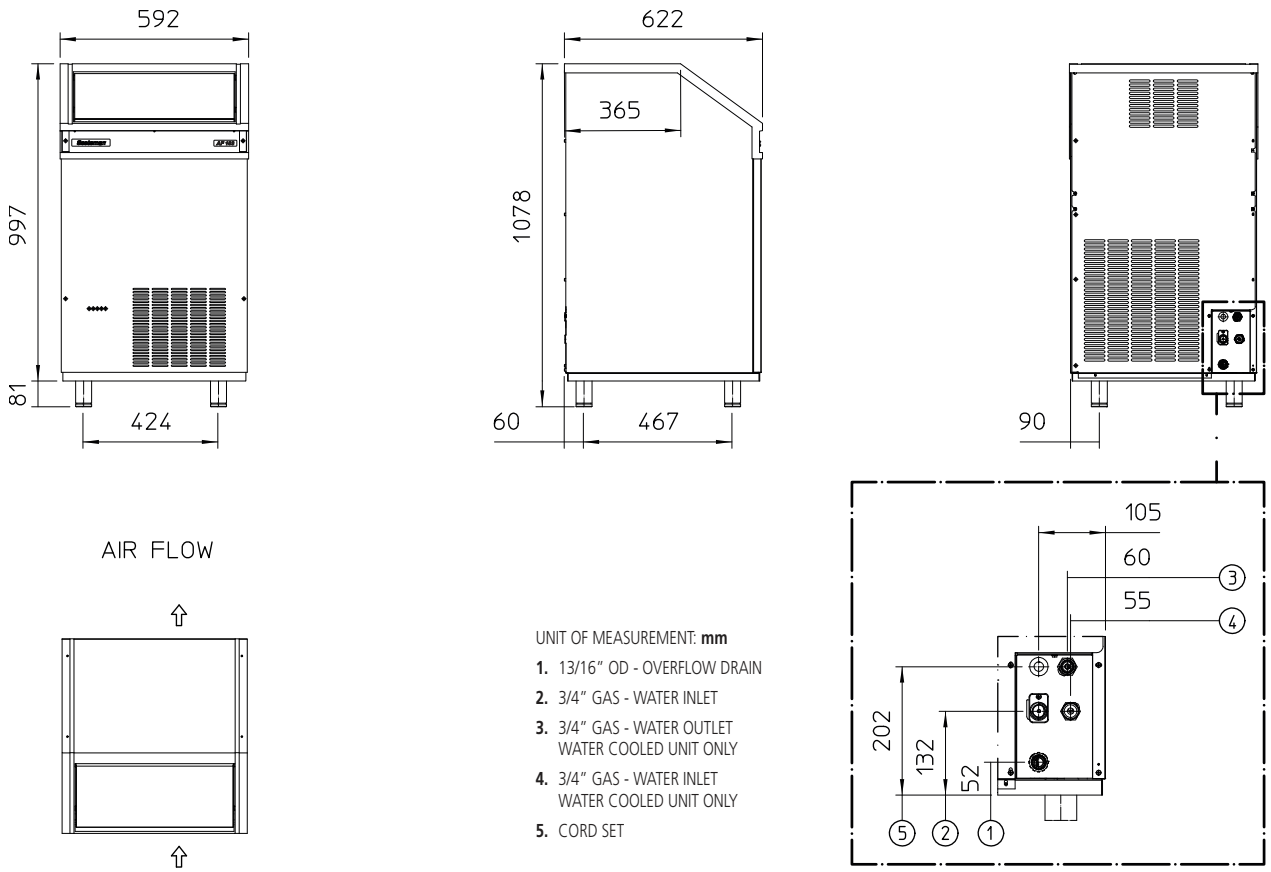

UNIT OF MEASUREMENT: **mm**

1. 13/16" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET WATER COOLED UNIT ONLY
5. CORD SET

UNIT DATA		SHIPPING DATA	
Size (W x D x H)	592 x 622 x 1078 mm	Carton (W x D x H)	670 x 690 x 1180 mm
Net weight	66 kg	Weight	74 kg

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
AF 103 AS	230/50/1	120	120	93	12.1	11.5	4.2	550	1200	3 x 1.5	10
AF 103 WS	230/50/1	110	108	90	11.8	10.5	32.0	440	1200	3 x 1.5	10
AF 103 AS	230/60/1	131	123	97	12.0	12.0	4.0	540	1400	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions