POTATO PEELER PP-12+

Output: 12 Kg. per cycle.



- ✓ Depth with stand: 700 mm
- ✓ Height with stand: 1015 mm

Net weight: 38 Kg

Noise level (1m.): 70 dB(A)
Background noise: 32 dB(A)

Available Models

1000420	Potato peeler PP-12+ 230-400/50/3 ·370W
1000421	Potato peeler PP-12+ 230/50/1 ·400W
1000422	Potato peeler PP-12+ 220-380/60/3
1000423	Potato peeler PP-12+ 220/60/1
1000426	Potato peeler PP-12+ 440/60/3
1000427	Potato peeler PP-12+ 120/60/1

** Ask for special versions availability*

Sales Description

Aluminium made potato peeler.

Aluminium body potato peeler. Abrasive peeling. The abrasive is highly resistant and long lasting.

- ✓ Base Plate and chamber walls lined with abrasive.
- ✓ Aluminium body.
- ✓ Directable cylinder.
- ✓ Integral control panel complete with on/off push buttons and a 0-6 minute timer.

Optional

- ❑ Stainless steel floor stand.
- ❑ Filter with no-foam feature.
- ❑ Water inlet kit (2003971).

Accessories

- ❑ Stands for potato peelers PP / PPC
- ❑ Filters for potato peelers PP / PPC

Specifications

Hourly production: 220 Kg / 300 Kg
Capacity per load: 12 Kg
Timer (min-max): 0 ' - 6 '
Plate speed: 317 rpm

Total loading: 400 W (1~) / 370 W (3~)

External dimensions (WxDxH)

- ✓ Width: 395 mm
- ✓ Depth: 700 mm
- ✓ Height: 503 mm

External dimensions with stand

- ✓ Width with stand: 411 mm


DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

product sheet
updated **21/10/2022**

POTATO PEELER PP-12+

Output: 12 Kg. per cycle.

DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

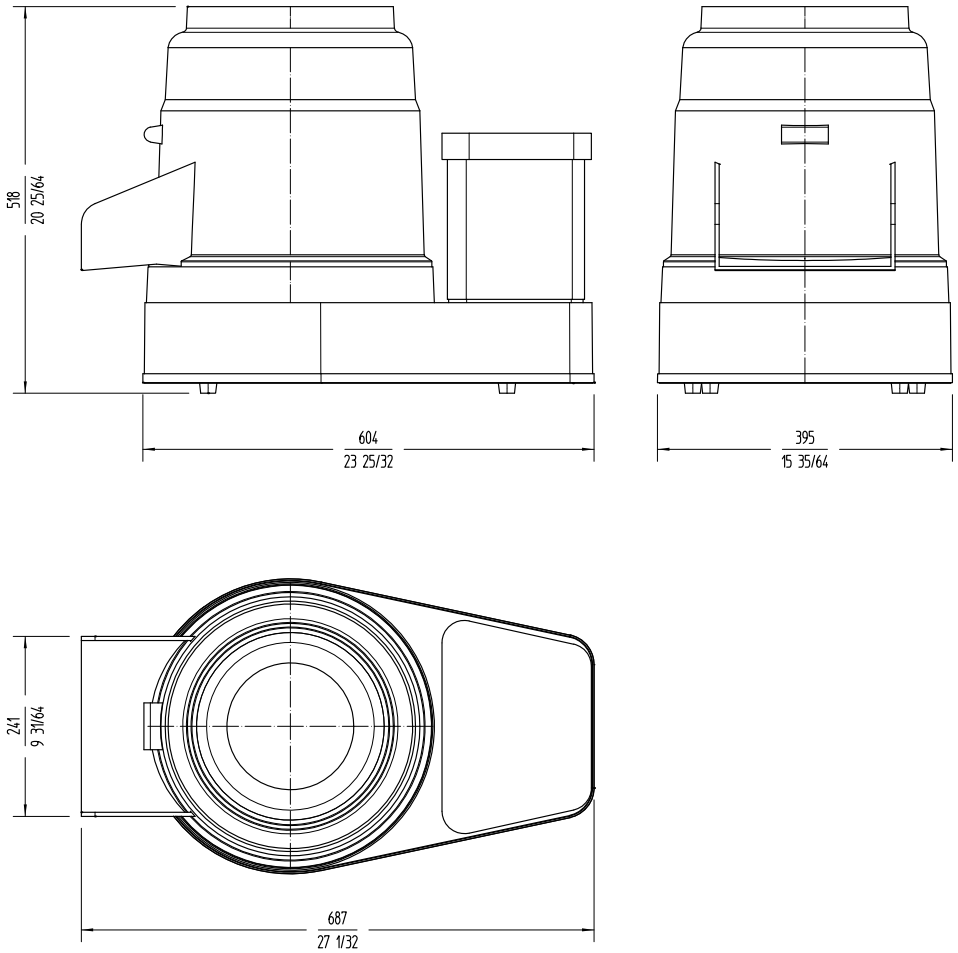

sammic | www.sammic.com
Food Service Equiment Manufacturer
Polígono Basarte, 1.
20720 Azkoitia, Spain
phone +34 943 15 72 36
sales@sammic.com

Project	Date
Item	Qty
Approved	

product sheet
updated **21/10/2022**