AC 127 EcoX

Self Contained Ice Machine 75 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Routine maintenance visible alarm light on front panel. Water system protected by patented anti-scale system.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.



AC M 127
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

39 kg

CERTIFICATIONS

CE WRAS DVE

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 75 kg

3 October 2020


AC 127 EcoX

Self Contained Ice Machine 75 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	

Self Contained Ice Machine 75 kg

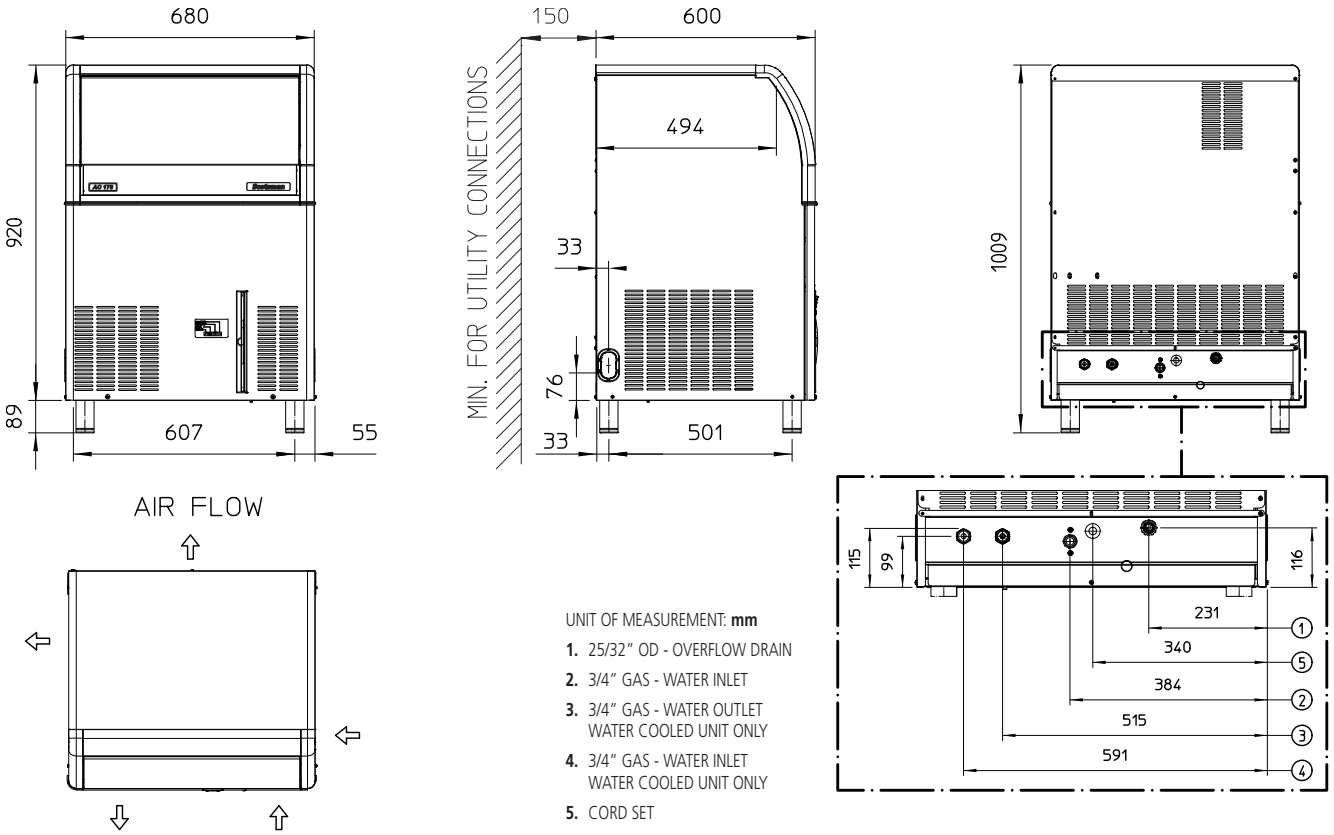

UNIT OF MEASUREMENT: **mm**

1. 25/32" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET WATER COOLED UNIT ONLY
5. CORD SET

UNIT DATA		SHIPPING DATA	
Size (W x D x H)	680 x 600 x 1009 mm	Carton (W x D x H)	750 x 670 x 1100 mm
Net weight	65 kg	Weight	75 kg

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
ACM 127 AS	230/50/1	75	74	60	21.5	12.9	7.4	670	1400	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions