EC 107 EcoX XSafe

Self Contained Ice Machine 53 kg

Scotsman Ice Systems

Item #:	
Project:	
Quantity:	



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 107
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM	INTERNAL BIN CAPACITY
Air cooled	23 kg
REFRIGERANT GAS	
R290	
VOLTAGE V/Hz/ph	
230/50/1	

CERTIFICATIONS

CE WRAS DVE

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 53 kg

14 September 2020


EC 107 EcoX XSafe


Self Contained Ice Machine 53 kg


Scotsman Ice Systems


Item #:
Project:
Quantity:


Self Contained Ice Machine 53 kg

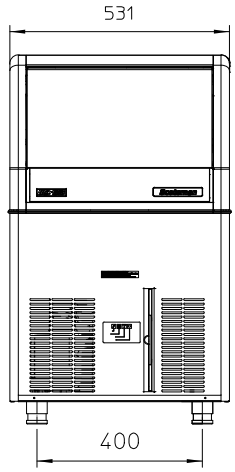

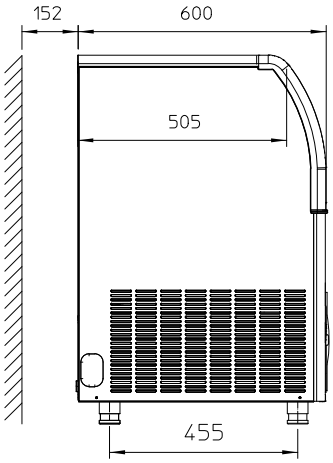

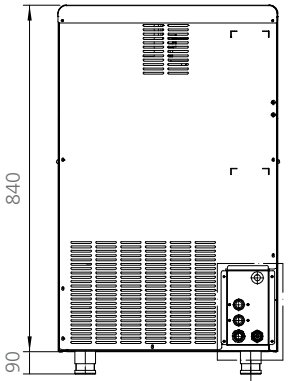

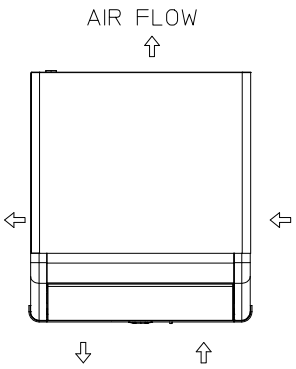

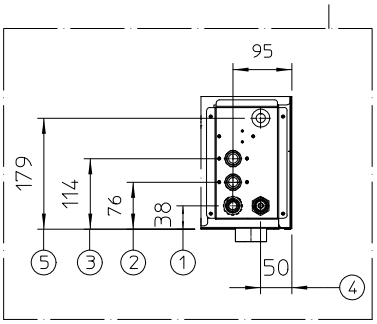

UNIT OF MEASUREMENT: **mm**

1. 13/16" WATER OUTLET
2. 3/4" GAS - WATER INLET
   WATER COOLED UNIT ONLY
3. 3/4" GAS - WATER INLET
4. 3/4" GAS - WATER OUTLET
   WATER COOLED UNIT ONLY
5. CORD SET

UNIT DATA		**SHIPPING DATA**	
Size (W x D x H)	531 x 600 x 930 mm	Carton (W x D x H)	600 x 670 x 950 mm
Net weight	49 kg	Weight	56 kg

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	**Voltage**	**10°C/10°C**	**21°C/10°C**	**32°C/21°C**	**kWh/ 100 kg**	**kWh/ 24h**	**l/h**	**W**	**W**	**No. x Ømm²**	**A**
		kg	kg	kg							
ECM 107 AS	230/50/1	53	51	43	24.9	10.7	5.2	580	1215	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions