SPG403MS

Family	Professional dishwasher
Subfamily	Undercounter glasswashers
Line	Ecoline
Basket dimensions	400x400 mm
Washing pump	Standard



Accessories Included

Cutlery basket	1x PHOOS01	**Water supply hose**	Yes - 1,5m
Flat basket	2x PB40G01	**Drain hose**	Yes - 2m

Target

Solutions	Coffee shops/Wine bars

Programs

Programs	3 automatic programs; 1 fully customizable program
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 83°C / Tank 60°C - 4'; Boiler 83°C / Tank 60°C - 1' 30"; Boiler 83°C / Tank 60°C - 2' 30"
Maximum basket/hour	40
Maximum dishes/hour	640

Interface

Display	4 digit	**Salt alert**	Yes
Number of buttons	5	**Manual diagnostic**	Yes
On/Off button	Yes		

Construction

Tank	With printed base	**Rack guides**	Embossed

Construction	Partial double wall	**Hood elevation system**	Manual
Tank material	Stainless steel AISI 304	**Filter**	4-stages filter system
Back panel	Galvanized	**Tank capacity**	7 l
Door	Double wall	**Boiler capacity**	4,5 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	**Protection class**	IPX4
		Adjustable feet	Yes
		Drain max. height	600 mm
Lower washing system	One washing and one combined rinse spray arms, stainless steel and plastic		
Tank filter	Plastic		
Door gasket	Only up		

Technical Features


Tank heating element power	1400 W	**Max water hardness**	12°f - 7°dH
Boiler heating element power	2700 W	**Inlet pressure**	250-1000 kPa (min-max)
Washing pump power	290 W	**Detergent load**	1,5 l/h
Default connection	3000 W	**Rinse load**	0,4 l/h
Water cycle consumption	3 l	**Usable load height**	309 mm
Minimum water cycle consumption	3 l	**Depth with open door**	882 mm
Warm water connection	5°C	**Product dimensions WxDxH**	440x555x695 mm
Max temperature inlet water	60°C		

Electrical Connection

Plug	(F;E) Schuko	**Power connection**	230 V~ / 14 A / 3,1 kW /50 Hz

Equipments

Drain pump	Yes	**Automatic start**	Yes, default OFF
Peristaltic detergent doser	Electronic control	**Cycle counter**	Yes
		Partial renewal of water in the tank and built-in drain pump	Yes
Peristaltic rinse-aid doser	Electronic control		
Deafult chemicals dosing unit of measure	gr/lt	**Water supply pipe diameter**	DN15 - ½”
Automatic incorporated softener	Yes	**Drain supply pipe diameter**	DN20-G 3/4"
Boiler thermostop	Yes - default	**Detergent (red) hose lenght**	2,2m
Tank thermostop	Yes		
Soft Start system	Yes	**Rinse aid (blue) hose lenght**	2,2m

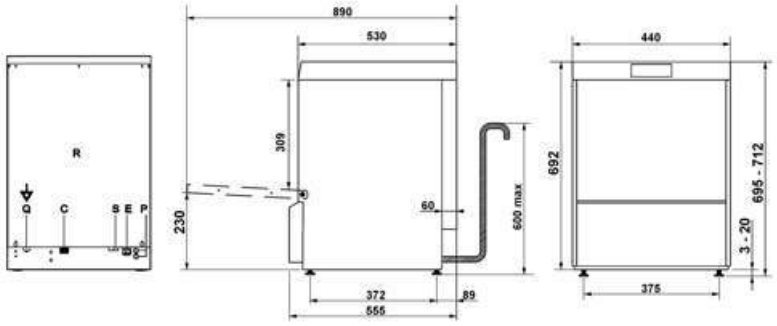

R	Pannello retro	Lower back panel
Q	Morsetto equipotenziale	Earth terminal
C	Tubo di carico	Filler hose
S	Tubo di scarico	Drain hose
P	Tubi pompe peristaltiche	Peristaltic hoses
E	Cavo alimentazione elettrica	Electricity supply cable

Not included accessories



RB40G01

Universal wire basket with flat bottom, Ø 400 mm, h 140 mm



WH00S01

Wire insert for 12 small dishes

WB40G01

Universal wire basket with flat bottom, 400x400x120 mm

KITRB40G01

Kit of 2 wire round baskets and adaptor for Ecoline



WS4

Underframe for glasswasher 400, 495x530x490 mm



PHOOGR4

Glass basket for 400x400 glasswashers



PB40C02

Universal flat bottom polypropylene double basket, 400x400x227 mm



RB40A3

Adapter for round basket for single wall models and 460 mm glasswashers



PHOOS01

Polypropylene single basket for cutlery



WB40G02

Sloped bottom 4 compartments wire basket for max 90 mm diameter glasses, 400x400x168 mm



WB40PG4

Wire basket for plastic glasses with flat bottom, 400X400X210 mm

WB40G03

Sloped bottom 3 compartments wire basket for max 120 mm diameter glasses, 400x400x168 mm



WB40D01

Wire basket for 16 dishes max diameter 315 mm, 400x400 mm



PHOOS02

6 compartments polypropylene basket for cutlery